


ASPHALT IS APPLIED UNIFORMLY TO EACH
PLY AT EVT, AT A RATE OF 25 LBS
PER 100 SQ/FT OF ROOF SURFACE (±15%)

- NOTES:
- 1. REFER TO FIRESTONE WEBSITE FOR MOST CURRENT INFORMATION AT firestonebpco.com.
 - 2. WOOD NAILER MUST BE INSTALLED TO MEET APPLICABLE BUILDING CODES OR 200 LBS PER LINEAR FOOT MINIMUM IN ANY GIVEN DIRECTION.
 - 3. ATTACH WOOD NAILERS WITH SUITABLE FASTENERS.
 - 4. THIS DETAIL SHOULD BE USED ONLY WHERE THE DECK IS SUPPORTED BY THE OUTSIDE WALL.
 - 5. GUTTER AND ALL SHEET METAL IS TO BE INSTALLED PER SMACNA GUIDELINES.
 - 6. WOOD NAILER MUST EXTEND BEYOND THE METAL FLANGE IN ALL DIRECTIONS.
 - 7. COVER EXPOSED PORTIONS OF METAL FLANGE WITH FLASHING MATERIAL.

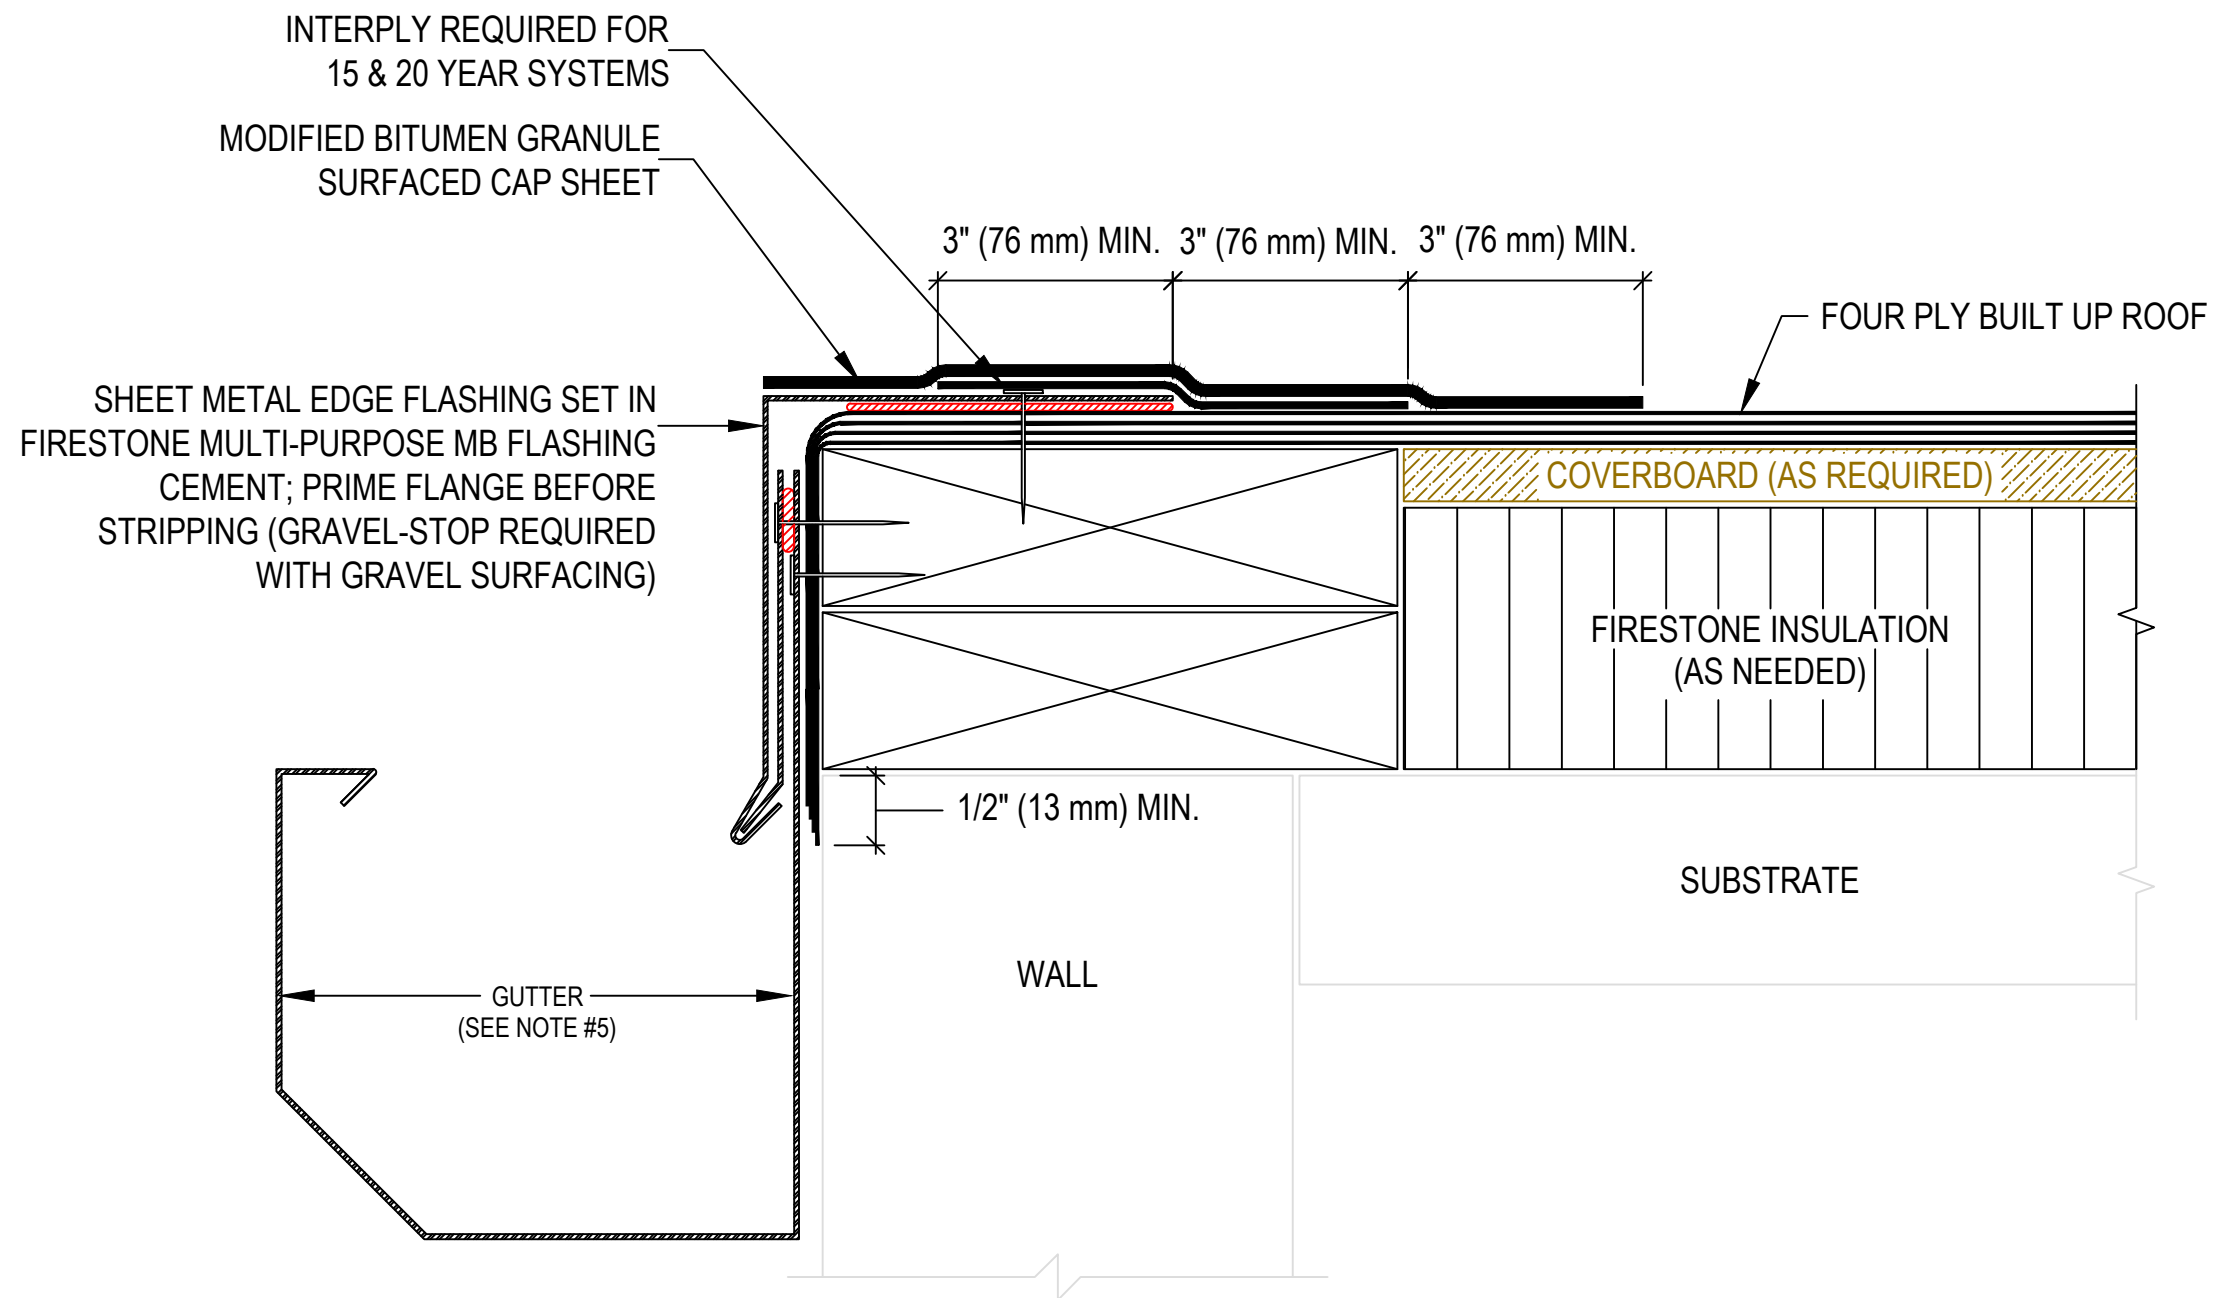

MAXIMUM WARRANTY: 20 YEARS

Firestone
BUILDING PRODUCTS
NOBODY COVERS YOU BETTER.™
www.firestonebpco.com

GUTTER W/O FLANGE USING STRIP FLASHING

ASPHALT SYSTEMS

ACCEPTABLE SYSTEMS: BUR

ISSUE/REVISION
DATE:
01/17/2014
NOT TO SCALE

DETAIL NO.
BU-RE-2